

ASUS GX601 Midi Tower Black

Brand : ASUS

Product code: 90DC0020-B39000


Product name : GX601

- Premium design & aesthetics: Made for showcase builds with three tempered-glass panels, brushed-aluminum frame and integrated Aura Sync RGB front lighting
- Clean build made easy: A multifunction cover with graphics card holders, a PSU shroud and a translucent rear cable cover offer effortless cable management
- Versatile GPU mounting: Install three graphics cards in standard orientation, or two vertically for extra showcase flair using a bundled bracket
- Ready for serious cooling: Supports an up to EATX motherboard, with room for 420mm front radiators and water-cooling pump and reservoir
- Advanced I/O panel: USB 3.1 Gen 2 Type-C™ port, four USB 3.0 ports, an RGB-lighting control button and a fan-speed control button
- Comfortable case handles: Easily carry your prized build to LAN parties with ergonomic and stylish fabric handles

ATX Mid Tower, 2 x 2.5"/3.5", 4 x 2.5", 1 x USB 3.1 Type-C, 4 x USB 3.1 Gen 1, Headphone, Microphone, 250 x 565 x 591 mm



Design		Ports & interfaces	
Material	Aluminium	USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity *	4
Form factor *	Midi Tower	USB 3.2 Gen 2 (3.1 Gen 2) Type-C ports quantity *	1
Type *	PC	Cooling	
Product colour *	Black	Front fans installed	3x 140 mm
Supported motherboard form factors *	ATX, EATX, micro ATX, Mini-ITX	Number of front fans supported (max)	3
Number of 3.5" bays *	2	Front fans diameters supported	120,140 mm
Number of 2.5" bays	4	Rear fans installed	1x 140 mm
Number of expansion slots	8	Number of rear fans supported (max)	1
Side window	✗	Rear fans diameters supported	120,140 mm
Suitable for	Gaming	Number of top fans supported (max)	3
Illumination	✓	Top fans diameters supported	120,140 mm
Illumination colour	Multi	Liquid cooling capability	✓
Illumination location	Front	Storage	
Tempered glass panel(s)	✓	Supported HDD sizes *	2.5,3.5"
Anti-dust filter	✓	HDD/SSD combo cage	✓
Cable management	✓	Number of HDDs supported	6
On/off button	✓	Weight & dimensions	
LED indicators	Activity, Power	Width	250 mm
Maximum CPU cooler height	19 cm	Depth	565 mm
Maximum graphics card length	45 cm	Height	591 mm
Maximum PSU length	22 cm	Weight	18 kg
Power supply		Logistics data	
Power supply included *	✗	Harmonized System (HS) code	84733080
Power supply location	Bottom		
Ports & interfaces			
Audio input	✓		
Audio output	✓		

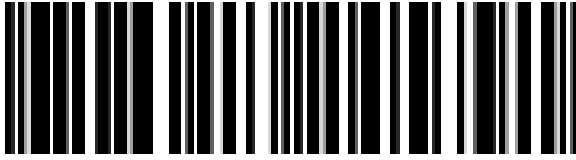

4718017245791

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 31-OCT-2024. Prints or copies of Information are only valid on the printed Publication date