ASUS

ASUS ROG Rapture GT-AX11000 Pro wireless router Gigabit Ethernet Tri-bande (2,4 GHz / 5 GHz / 5 GHz) Noir

Marque : ASUS

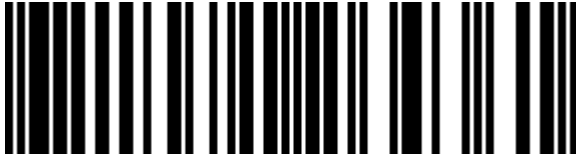**Nom du produit :** ROG Rapture GT-AX11000 Pro

Code produit: 90IG0720-MU2A00

ASUS ROG Rapture GT-AX11000 Pro. WAN connection type: RJ-45. Wi-Fi band: Tri-bande (2,4 GHz / 5 GHz / 5 GHz), Top Wi-Fi standard: Wi-Fi 6 (802.11ax), WLAN data transfer rate (max): 4804 Mbit/s. Ethernet LAN interface type: Gigabit Ethernet, Standards réseau: IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n. Algorithme de sécurité soutenu: 64-bit WEP, 128-bit WEP, WPA-Enterprise, WPA-PSK, WPA2-Enterprise, WPA2-PSK, WPS. Type de produit: Routeur, Couleur du produit: Noir, Voyants: LAN, Énergie, USB, WAN, WLAN, WPS

WAN connection

Ethernet WAN *	✔
DSL WAN *	✘
SIM card slot *	✘
3G/4G USB modem compatibility *	✘
WAN connection type	RJ-45

Wireless LAN features

Wi-Fi band *	Tri-band (2.4 GHz / 5 GHz / 5 GHz)
Top Wi-Fi standard *	Wi-Fi 6 (802.11ax)
WLAN data transfer rate (max) *	4804 Mbit/s
Wi-Fi standards	802.11a, 802.11b, 802.11g, Wi-Fi 4 (802.11n), Wi-Fi 5 (802.11ac), Wi-Fi 6 (802.11ax)
WLAN data transfer rate (first band)	4804 Mbit/s
WLAN data transfer rate (second band)	1148 Mbit/s
WLAN data transfer rate (third band)	4804 Mbit/s

Network

Ethernet LAN *	✔
Ethernet LAN interface type *	Gigabit Ethernet
Networking standards	IEEE 802.11a, IEEE 802.11ac, IEEE 802.11ax, IEEE 802.11b, IEEE 802.11g, IEEE 802.11n
Port forwarding	✔
Port triggering	✔
Dynamic DNS (DDNS)	✔
Number of guest networks (2.4 GHz)	3
Number of guest networks (5 GHz)	3
Support Samba (storage)	✔
Built-in FTP server	✔
Media server	✔
VPN Passthrough	✔

Security

Access Control List (ACL)	✔
URL filtering	✔
System event log	✔
DMZ support	✔

Protocols

DHCP client	✔
DHCP server	✔
Universal Plug and Play (UPnP)	✔

Design

Product colour	Black
Indication light	✔
LED indicators	LAN, Power, USB, WAN, WLAN, WPS
On/off switch	✔
Product type *	Tabletop router

Antenna

Antenna design *	External
Antennas quantity	8

Features

Built-in processor	✔
Processor frequency	1.8 MHz
Processor cores	4
Internal memory	1000 MB
Flash memory	256 MB

Power

Power source type *	DC
AC input voltage	110 - 240 V
AC input frequency	50 - 60 Hz
Output voltage	19 V
Output current	3.42 A

Ports & interfaces

Ethernet LAN (RJ-45) ports *	5
USB port *	✔
USB 3.2 Gen 1 (3.1 Gen 1) Type-A ports quantity	2
DC-in jack	✔

Management features

Quality of Service (QoS) support	✔
Reset button	✔
WPS push button	✔

Security

Security algorithms	64-bit WEP, 128-bit WEP, WPA-Enterprise, WPA-PSK, WPA2-Enterprise, WPA2-PSK, WPS

System requirements

Windows operating systems supported	Windows 11
Mac operating systems supported	Mac OS X 10.6 Snow Leopard, Mac OS X 10.7 Lion, Mac OS X 10.8 Mountain Lion

Weight & dimensions

Width	354.9 mm
Depth	354.9 mm
Height	193.2 mm
Weight	2.18 kg

Packaging data

Package width	401 mm
Package depth	396 mm
Package height	141 mm
Package weight	3.72 kg
Package type	Box

4711081264361

4711081903598

0195553264341

195553264341