

# ASUS ROG -STRIX-1000G-AURA-WHITE-GAMING power supply unit 1000 W 24-pin ATX ATX Wit

**Merk :** ASUS

**Productfamilie:** ROG

**Artikelcode:** 90YE00P5-BONA00

**Productnaam :** ROG-STRIX-1000G-AURA-WHITE-GAMING

ASUS ROG -STRIX-1000G-AURA-WHITE-GAMING. Totaal vermogen: 1000 W, AC invoer voltage: 100 - 240 V, Gecombineerd vermogen (+3.3V): 120 W. Motherboard power connector: 24-pin ATX, Motherboard power cable length: 60 cm, SATA power cable length: 120,400 mm. Bedoeld voor: PC, Power supply unit (PSU) form factor: ATX, 80 PLUS certificatie: 80 PLUS Gold. Kleur van het product: Wit, Type koeling: Actief, Ventilator diameter: 13,5 cm. Meegeleverde kabels: CPU, PCIe, Peripheral (Molex), SATA




Energie		Poorten & interfaces	
Totaal vermogen *	1000 W	Lengte PCI Express-stroomkabel	67,5 cm
AC invoer voltage *	100 - 240 V	CPU power connector (4+4 pin)	✓
Gecombineerd vermogen (+3.3V)	120 W	Lengte CPU-stroomkabel	65 cm
Gecombineerd vermogen (+12V)	996,6 W	Bekabelingstype	Volledig modulair
Gecombineerd vermogen (+5V)	120 W	<b>Prestatie</b>	
Gecombineerd vermogen (-12V)	3,6 W	80 PLUS certificatie *	80 PLUS Gold
Gecombineerd vermogen(+5Vsb)	15 W	Bedoeld voor *	PC
Max huidige output (+3.3V)	22 A	Vormfactor van de voeding (PSU) *	ATX
Max huidige output(+12V)	83,3 A	ATX version	3.0
Max huidige output (+5V)	22 A	Stille modus	✓
Max huidige output (-12V)	0,3 A	Bearing technologie	DBB
Max huidige output (+5Vsb)	3 A	<b>Design</b>	
Stroomspanning bescherming	Overstroom, Te hoog vermogen, Overspanning, Oververhitting, Kortsluiting, Onder spanning	Kleur van het product	Wit
<b>Poorten &amp; interfaces</b>		Type koeling	Actief
Motherboard power connector *	24-pin ATX	Ventilator diameter	13,5 cm
Lengte stroomkabel moederbord	60 cm	Aantal ventilatoren	1 ventilator(en)
Aantal SATA power connectors	5	Ventilator locatie	Boven
Lengte SATA-stroomkabel	120,400 mm	Belichting	✓
Peripheral (Molex) power connectors (4-pin) *	4	Aan/uitschakelaar	✓
Lengte stroomkabel randapparaat (Molex)	150,400 mm	<b>Inhoud van de verpakking</b>	
PCI Express power connectors (8-pin)	4	Meegeleverde kabels	CPU, PCIe, Peripheral (Molex), SATA
PCI Express-voedingsconnectoren (16-pins)	1	<b>Gewicht en omvang</b>	
		Breedte	180 mm
		Diepte	150 mm
		Hoogte	86 mm
		Gewicht	3,03 kg

## Technische details

Certificaten van naleving

RoHS

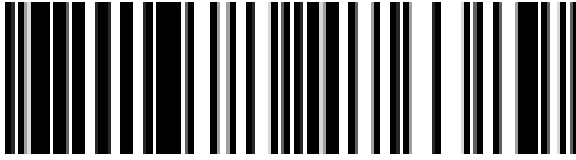

4711387276389

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 19-OCT-2024. Prints or copies of Information are only valid on the printed Publication date